

# Testing Standby Generator Sets - Resistive Versus Reactive

Information Sheet # 17

## 1.0 Introduction


To ensure a backup generator system will perform as specified, it is necessary to carry out a fully witnessed test off-line at the time of initial installation, as part of the commissioning process. It is also important to perform load tests during periodic planned maintenance checks.

*This information sheet discusses the use of portable load banks used for generator testing and the differences between resistive load bank testing and reactive load bank testing.*

## 2.0 Provision of Test Equipment and Testing

Distributors for the principal generator set manufacturers have the equipment and technicians throughout their dealer networks to perform the required testing. *(Continued over)*

TOTAL LOAD kW	TYPICAL LOAD STEP kW RESOLUTIONS	
200	240/480 VAC	5, 10, 10, 25, 50, 100 kW
250	240/480 VAC	5, 10, 10, 25, 50, 50, 100 kW
400	240/480 VAC	5, 10, 10, 25, 50, 100, 100, 100 kW
400	480 VAC	5, 10, 10, 25, 50, 100, 100, 100 kW
VOLTAGE RATING (3 PHASE, 60 Hz)		

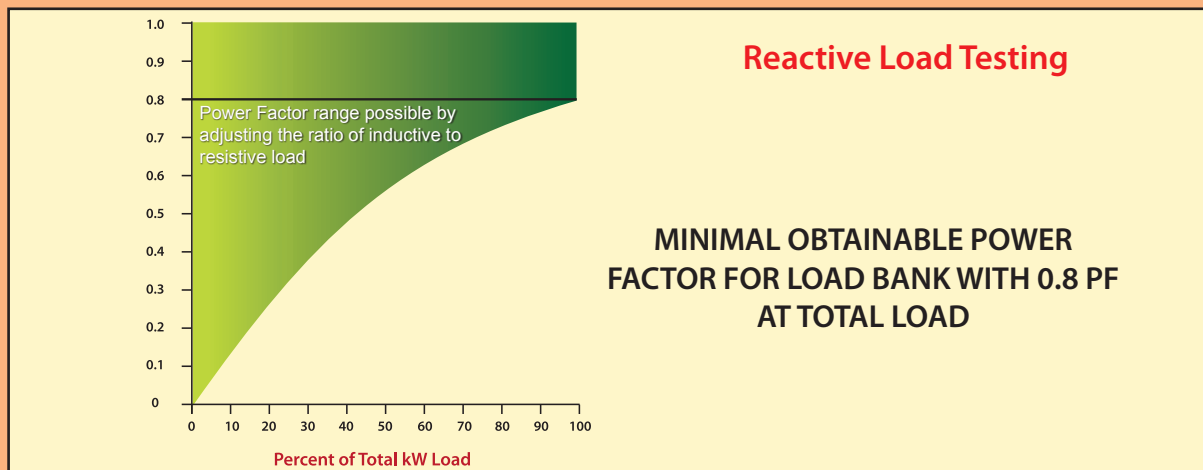

To fulfill our commitment to be the leading supplier and preferred service provider in the Power Generation Industry, the Central Power Systems & Services team maintains up-to-date technology and information standards on Power Industry changes, regulations and trends. As a service, our **Information Sheets** are circulated on a regular basis, to existing and potential Power Customers to maintain awareness of changes and developments in engineering standards, electrical codes, and technology impacting the Power Generation Industry.

The installation information provided in this information sheet is informational in nature only, and should not be considered the advice of a properly licensed and qualified electrician or used in place of a detailed review of the applicable National Electric Codes and local codes. Specific questions about how this information may affect any particular situation should be addressed to a licensed and qualified electrician.

**Liberty - Corporate Office**  
9200 Liberty Drive  
Liberty, MO 64038  
816.781.8070 Ph  
816.781.2207 Fax

**Liberty, MO Branch**  
1900 Plumbers Way  
Liberty, MO 64038  
816.415.6700 Ph  
816.415.6767 Fax

**Springfield, MO Branch**  
3100 E. Kearney  
MO 65803  
417.865.0505 Ph  
417.865.4304 Fax

**Wichita, KS Branch**  
4501 W. Irving  
KS 67209  
316.943.1231 Ph  
316.943.4560 Fax

**Salina, KS Branch**  
1944B N. 9th St.  
KS 67401  
785.825.8291 Ph  
785.825.8282 Fax

**Great Bend, KS Branch**  
625 E. 10th St.  
KS 67530  
620.792.1361 Ph  
620.792.1364 Fax

**Colby, KS Branch**  
1920 Thielen Ave.  
KS 67701  
785.462.8211 Ph  
785.462.8286 Fax

**Liberal, KS Branch**  
1150 E. Hwy. 54  
KS 67901  
620.624.7274 Ph  
620.624.7277 Fax

**Woodward, OK Branch**  
127 NW Hwy. 270  
OK 73801  
580.256.6014 Ph  
580.256.0314 Fax



*(Continued from previous page)*

Testing should only be carried out by trained, experienced personnel and conducted as directed by applicable codes and by the manufacturer. This information sheet details some of the testing procedures specified by the National Fire Protection Agency code NFPA 110 for standby generator sets.

### 3.0 Resistive Load Testing

This is the most common means of testing a generator set with its intended load. It will allow the owner to be sure the set produces 100% of its output at 1.0 power factor by connecting full kW loading. This load test measures whether the generator is producing at its full power rating, dissipating the required amount of engine exhaust gases and heat, and producing the required amount of thermal energy into the engine cooling system.

Resistive load testing verifies that the engine and generator system will produce and maintain full load without overheating and shutting down. It also evaluates other critical engine systems such as oil and fuel, assesses whether all components of the standby system will work together as designed and intended, and can identify any potential weaknesses under controlled conditions. Also it can be used to burn out any carbon deposits in the cylinders or exhaust system, thereby reducing any wet stacking problems due to frequent operation with light electrical loads.

Normally, it is sufficient to run a set with an artificial load for a maximum of eight hours. Some government and military specifications require 18- to 24- hour duration tests.

### 4.0 Reactive Load Bank Testing

A reactive load equal to 75% of the resistive rating can be paralleled in combination with the primary resistive load bank to measure the full kVA nameplate rating at 0.8 power factor of the standby generator set. This also allows for proper calibration of load sharing and voltage regulating systems in parallel operation installations. Installations with critical large motor loads might warrant this testing. As this has a higher cost, it is normally only used for new installation start-up, as the generator kVA will not deteriorate or change once tested and proven initially.

### 5.0 Frequency of Load Bank Maintenance and Operational Testing

NFPA 110 (2013 edition) details the testing requirements for Emergency Power Supply Systems (EPSS) and the recommended frequency of testing. Clause 8.3.1 states. "The EPSS shall be maintained to ensure to a reasonable degree that the system is capable of supplying service within the time specified for the type and for the time duration specified for the class."

### 6.0 National Fire Protection Agency (NFPA) 110 2013 Edition (Clause 8.4 Operational Inspection and Testing)

Clause 8.4.2 Diesel generator sets in service shall be exercised at least once monthly, for a minimum of 30 minutes, using one of the following methods.

- (1) loading that maintains the minimum exhaust gas temperatures as recommended by the manufacturer
- (2) Under operation temperature conditions and at not less than 30 percent of the EPS standby nameplate kW rating

Clause 8.4.2.4 Spark-ignited generator sets in service shall be exercised at least once month with the available EPSS load for 30 minutes or until the water temperature and the oil pressure have stabilized.

Any Emergency Power Supply System (EPSS) must meet NFPA 110 regulations for one of the two levels.

**Level 1:** Clause 4.4.1. Level 1 systems shall be installed where failure of the EPSS to perform could result in loss of human life or serious injuries.

**Level 2:** Clause 4.4.2. Level 2 systems shall be installed where failure of the EPSS to perform is less critical to human life and safety.

#### **For more information about NFPA 110**

NFPA Headquarters, 1 Batterymarch Park, P.O. Box 9101, Quincy, MA 0269-9101 • NFPA website: www.nfpa.com

### 7.0 Web Site Addresses for Reference on Load Testing

The following are useful web sites for suppliers of load banks with details of the equipment available.

Avtron Loadbank Inc.	<a href="http://www.load-bank.com">www.load-bank.com</a>
ComRent International LLC	<a href="http://www.comrent.net">www.comrent.net</a>
Simplex Inc.	<a href="http://www.simplexdirect.com">www.simplexdirect.com</a>