



DESCRIPTION:

POWERFORCE® Oil & Gas industry generators are designed to meet the rugged demands of the Oil & Gas industry environment, from exploration to production. Each model has been designed to provide reliable continuous power for typical Oil & Gas industry electrical loads. All models are extensively tested to ensure they meet the performance requirements of the industry. POWERFORCE® generators are packaged in our purpose-built generator assembly and test facility. Each set goes through a fully documented test procedure before leaving our plant. POWERFORCE® models utilize the PSI Natural Gas engines governed to run at 1800 rpm for long life and durability. All Oil & Gas industry generators are designed and packaged as Prime Power Rated sets. See rating below for prime power kW.

STANDARD FEATURES:

- Oil Makeup Tank - 16 Gallon Kenco
- Air Filter System - Single Stage Replaceable Filter
- Gas Treatment - Scrubber
- Dual Fuel - LPG, NG, Wellhead NG Compatible with Auto Switch
- Exhaust System - Dual: Catalyst and USFS Spark Arrestor
- Lubrication - Murphy/Kenco Oil Replenishment
- Safety Shutdown - Low Oil Pressure; Low Coolant Level, High Oil Temp

OPTIONAL EQUIPMENT:

- Block Heater - Kim Hotstart
- Cold Weather Options - CCV
- Air Filter System - Donaldson PSD PowerCore
- Oil Markup Tank - 5 Gallon
- Courtesy Power - 120 AC w/3 20A GFCI
- No Trailer - Pad

ENGINE ELECTRICAL SYSTEM:

Starting Motor Voltage	24DCV
Charger Amps	45
Battery Ampere Hours	200AH/1000CCA

POWER RATINGS: STANDBY: PRIME:

GASEOUSE FUEL	kW kVA Amp	kW kVA Amp
LPG	315 394 474A	266 333 401A
NATURAL GAS (NG)	444 555 668A**	390 488 587A
AMPERAGE	480V	@480V

ENGINE SPECIFICATION:

Manufacturer	PSI
Model	D21.9L
Emissions	US EPA Certified
Engine Speed (RPM)	1800
Max. HP Power 1800 RPM	684 ISO3046
Cylinder Arrangement	V-12
Combustion System	Stoichiometric
Aspiration	Turbocharged
Engine Type	Diesel Derivative
Fuel	Natural Gas / LPG
Number of Cylinders	12
Displacement in3 (liters)	21.9
Bore & Stroke inches (mm)	5.04x5.59
Cooling	Coil and Tube
Starting Aids	None
Compression Ratio	10.5:1
Air Cleaner Type	Dry
Exhaust Silencer dBA	USFS Spark Arrestor
Fuel Switch	Automatic

ALTERNATOR:

Configuration	4 Pole 3 Phase/NEMA Class H Insulation
Frequency	60HZ
Voltage Regulation	Automatic
No Load to full load regulation	
Coupling	Direct
Bearing	Single
Manufacturer	STAMFORD
Model	S4L1D-F41
Load Acceptance	-
Compliance	-
Construction	-

CONTROL PANEL: DGC-2020HD, DIGITAL GENSET CONTROLLER



The DGC-2020HD is equipped with a proven generator digital controller for rugged environments such as C&I applications, drill platforms, pump jack sites, and landfills. The premium control box has the capability to control the generator set manually, remotely or automatically.

- NFPA-110 compliant
- User friendly, fully-configurable, programmable, microprocessor-based logic controller
- Off-line Simulator Best-logic™ helps identify and troubleshoot the logic
- High contrast display is easy to read outdoors

WARRANTY / DISCLAIMER:

Except as may be expressly covered under applicable manufacturer(s) parts/product warranty, Central Power Systems & Services (CPS&S) liability arising out of service, repairs, or workmanship shall not exceed the cost of the original repair or service. Further, under no circumstances shall CPS&S be liable for incidental, consequential or other economic loss damages to customer. This includes but may not be limited to loss of use of equipment or vehicle, down time, inconvenience, cargo damage, overtime or any other costs or expenses resulting from services, repairs or workmanship.

ARRANGEMENT:

Coupling	Flexible
Enclosure	Yes
Base Arrangement	Generator & Containment
Spill Containment	110%

LUBRICATING SYSTEM:


Total Lubricating Capacity quarts (liter)	42.25/40
Recommended lubricating oil grade	SAE 15W-40
Oil Pressure minimum 1800RPM- psi (bars)	43.5/3
Max. allowable Oil Temp F (C)	250/121

COOLING SYSTEM FOR OPERATING AT 120° AMBIENT

Cooling System	Radiator CAC Combo
Engine Coolant Capacity quarts. (liters)	50.1 Gallon
Fan	Pusher
Radiator	PSI
Cooling Air Flow	40,000

DIMENSIONS, WEIGHTS & SOUND LEVELS

Engine Data: PSI Spec Sheet 56100041, Rev 1.
 ** Standard Generator Breaker 600A, 100% Rated.

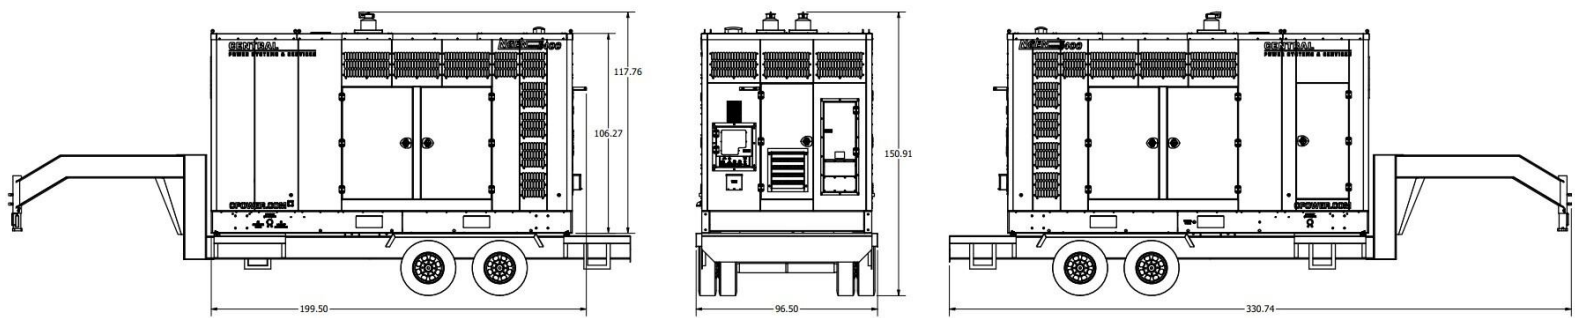

FUEL DATA:

GENERATOR SET ENCLOSURE DEMENSIONS* (ALL ARE IN INCHES & ARE APPROXIMATED)

Type	Consumptions (cu. Ft./ hour)	Length	Width	Height	Weight LBS	dBa
Natural Gas/LPG	4230 NG (1480 LPG)	192"	90.5"	117.75 " 9.8'	14,540 dry	86

Natural Gas Fuel Pressure: (35-100) PSI

LPG Fuel Pressure (30-250) PSI

All data subject to change without notice. The information in this white-page specification is believed to be accurate but all recommendations are made without warranty, since the conditions of use are beyond Central Power Systems & Services control. Central Power Systems & Services disclaims any liability in connection with the use of this information and does not warrant against infringement by reason of the use of any of its products in combination with other material or in any process. Central Power Systems & Services warrants only that the product complies with specifications agreed to in contracts of sale. Central Power Systems & Services reserves the right to change any of the technical information and data detailed in this paper.